




# CAREvent<sup>®</sup>

## MRI / ATV+

The O-Two CAREvent<sup>®</sup> ATV+ and MRI are pneumatically powered, battery-free ventilators designed for use in pre-hospital, hospital, and air ambulance settings. These ventilators offer 144 combinations of tidal volume and respiratory rate, allowing for precise control across a wide range of patients. Their SIMV mode enables spontaneous breathing, automatically adjusting ventilation based on the patient's efforts, while the manual override supports CPR guidelines with manual ventilation and chest compressions. The CPAP/PEEP mode eliminates the need for external devices, and built-in safety alarms alert to issues like circuit disconnection or low gas pressure. The devices are air-ambulance certified and the MRI model is non-ferrous, making it suitable for MRI environments. Overall, the O-Two CAREvent<sup>®</sup> ATV+ and MRI provide reliable, user-friendly ventilation for critical care and transport.

# Battery-Free Ventilators for Critical Care

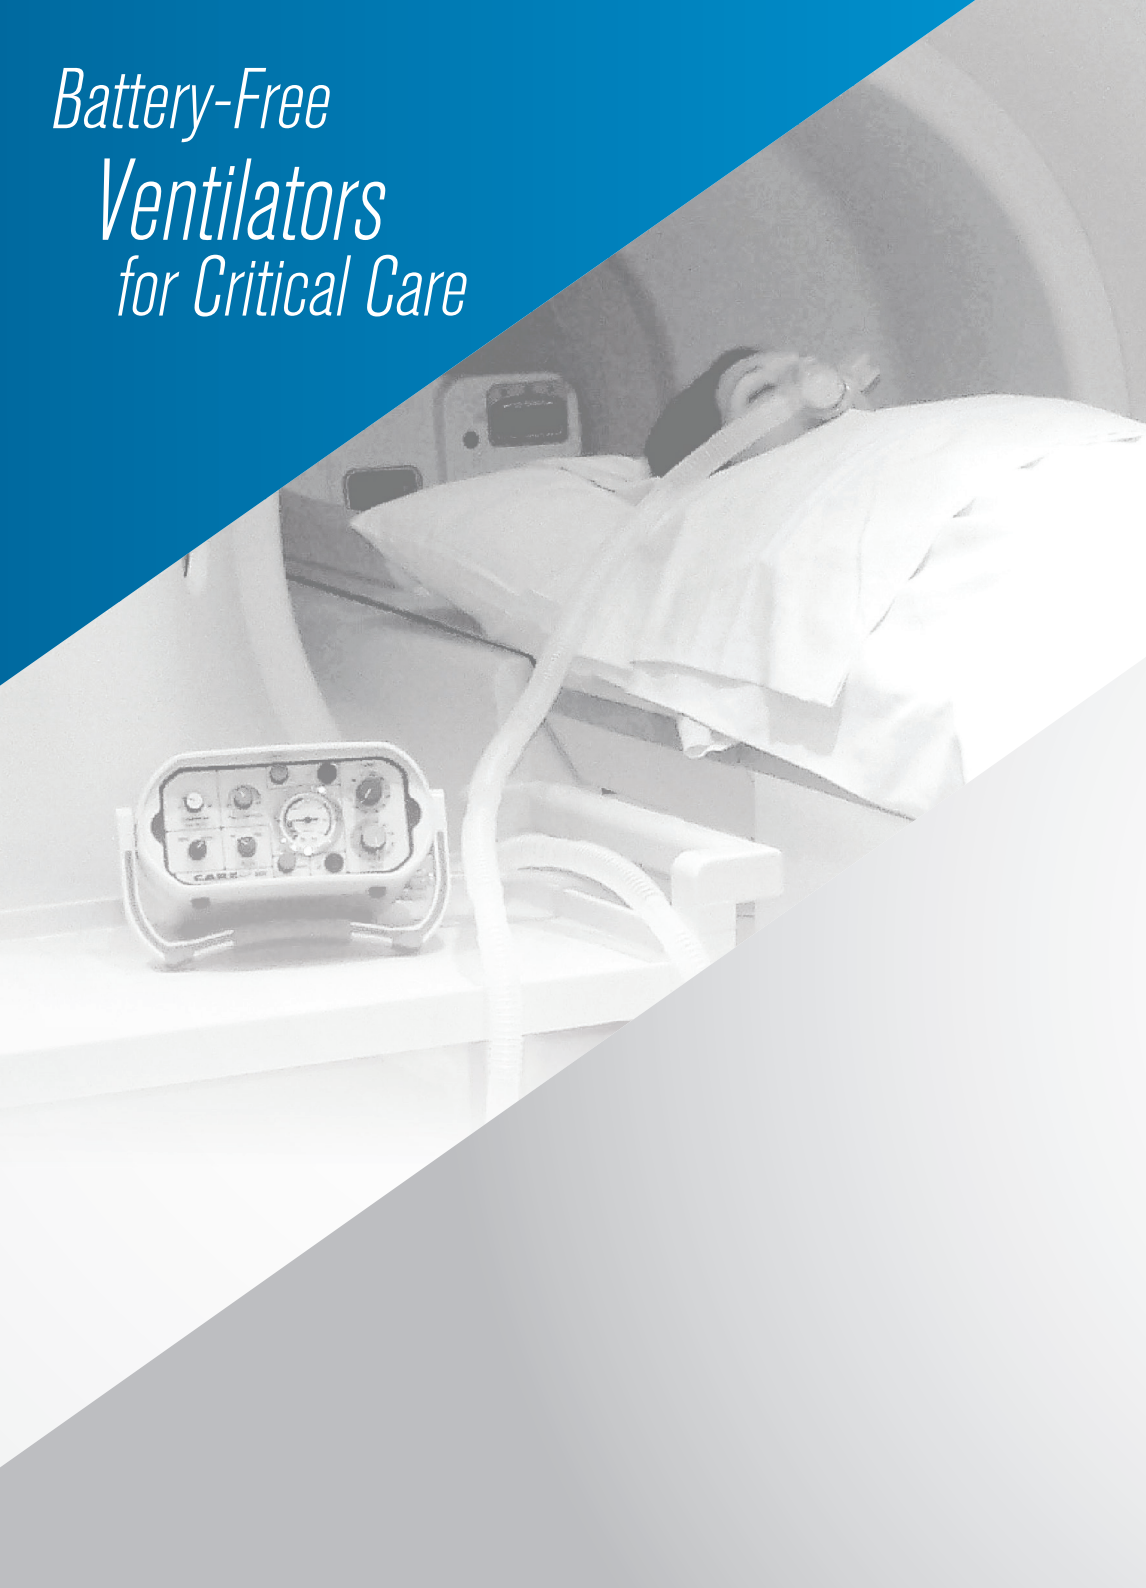

## SPECIFICATIONS

MINUTE VOLUME RANGE	2 - 14 L/min		
FREQUENCY RANGE	8 - 40 BPM		
I:E RATIO	1:2		
INPUT PRESSURE	45 - 87 PSI (3 - 6 Bar)		
AUTOMATIC FLOWRATE	6 - 42 L/min		
MANUAL FLOWRATE	6 - 42 L/min		
MANUAL OVERRIDE DELAY TIME	17 - 23 sec		
DEMAND BREATHING FLOWRATE	>100 L/min @ -6 cmH <sub>2</sub> O (hPa)		
DEMAND BREATHING TRIGGERING PRESSURE	-2 cmH <sub>2</sub> O max.		
AUTO SHUT OFF DELAY TIME	5 - 8 sec		
CPAP/PEEP	0 - 20 cmH <sub>2</sub> O		
OXYGEN CONCENTRATION	60 OR 100 %		
INSPIRATORY/EXPIRATORY RESISTANCE	< 6cmH <sub>2</sub> O (hPa) @ 60 L/min		
OPERATING TEMPERATURE	-18°C to + 50°C 0°F to +122°F		
STORAGE TEMPERATURE	- 40°C to + 60°C - 40°F to + 140°F		
GAS SUPPLY STATUS INDICATOR	Provides a visual indication of Gas Supply Status		
PRESSURE RELIEF RANGE	20 - 60 cmH <sub>2</sub> O 19.6 TO 58.8 mBar		
LOW INPUT PRESSURE ALARM	Audible pulsed alarm to indicate input pressure is dropping below the minimum requirement. Cannot be switched off		
AIRWAY PRESSURE ALARM	Audible alarm to indicate that the selected peak airway pressure has been reached		
BSI ALARM	Audible high frequency pulsed alarm indicating that the patient circuit is disconnected or insufficient ventilation pressure (<10 Cmh <sub>2</sub> O) has been attained		
PRESSURE GAUGE ACCURACY	± 2% Full Scale		
INPUT CONNECTION	9/16" DISS		
PATIENT CONNECTION	15 / 22 mm		
DIMENSIONS	9.27 x 7.6 x 4.4 inches 236 x 194 x 112 mm		
WEIGHT	2.84 Kg Approx for ATV+ 3.0 Kg Approx for MRI		
PATIENT VALVE DEAD SPACE	8 ml		
CYLINDER DURATION (ALUMINUM "D" SIZE CYLINDER CONTAINING 415 LITRES OF OXYGEN.)	ON 100% SETTING	(a) 2 LITRE Mv	207 minutes
		(b) 14 LITRE Mv	30 minutes
	ON 60% SETTING	(a) 2 LITRE Mv	345 minutes
		(b) 14 LITRE Mv	50 minutes

## ORDERING INFORMATION

01CV7000	CAREvent® MRI Conditional Transport Ventilator c/w Adjustable 20 - 60 cm H <sub>2</sub> O Pressure Relief System, Low Pressure Visual and Audible Alarm, Air Mix, Adjustable CPAP/PEEP, Breathing System Integrity (BSI) Alarm, 6' Supply Hose*, Deluxe Disposable Ventilation Circuit, Calibrated Test Lung & Universal Mask	Each
01CV6000	CAREvent® ATV+ Automatic Transport Ventilator c/w Adjustable 20 - 60 cm H <sub>2</sub> O Pressure Relief System, Low Pressure Visual and Audible Alarms, Air Mix, Adjustable CPAP/PEEP, Breathing System Integrity (BSI) Alarm, 6' Supply Hose*, Deluxe Disposable Ventilation Circuit, Calibrated Test Lung and Universal Resuscitation Mask	Each
01CV8015-CS	O-Two Deluxe Disposable Ventilation Circuit with PEEP Port (for use with ALS, ALS+, ATV+, MRI Compatible Ventilators)	Case/10
01CV8016-CS	O-Two CAREvent® MRI Ventilation Circuit with PEEP Port and 10 Foot Hose	Case/10
01CV8010-CS	O-Two Disposable Ventilation Circuit without PEEP Port (for use with EMT)	Case/10
17MP8690-CS	Air Intake Filter and Cover for CAREvent® ATV, ATV+, MRI Compatible Ventilators	Case/10
01TA1852	O-Two Medical 1 Litre Test Lung	Each

THIS PRODUCT HAS A TWO YEAR WARRANTY  
AGAINST MANUFACTURERS DEFECTS.

### ENHANCED SPECIFICATION FOR THE O-TWO CAREVENT® MRI:

Tested in an MRI environment to maximum static magnetic field strength of 3.0 Tesla



[www.otwo.com](http://www.otwo.com)

45A Armthorpe Road, Brampton, ON, Canada, L6T 5M4

Telephone: +1 905 792-OTWO (6896) N.A. Toll Free: +1 800 387 3405

Facsimile: +1 905 799 1339 Email: [resuscitation@otwo.com](mailto:resuscitation@otwo.com)

CE 1639

Rev 27 FEB 25

EC REP

MedNet EC-REP Ilb GmbH Borkstrasse, 10  
48163 Münster, Alemania

**o\_two** controlled™  
ventilation